


# SSPS-TCD100

**Piezoresistive sensor differential pressure**

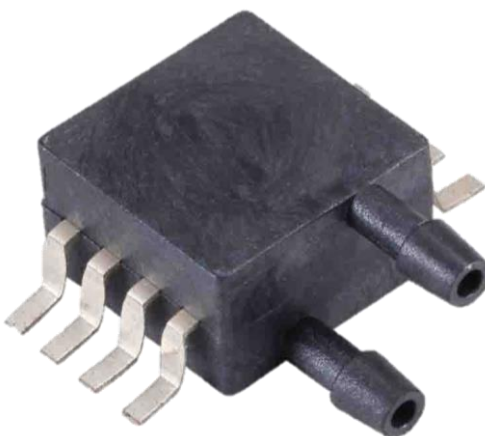

### PRODUCTS FEATURES

- Wide range : -100kPa...-0.5~0~0.5...700 kPa
- Optional 5V or 3.3V Power supply
- Differential pressure type
- For Non-corrosive Gas or Air
- Calibrated Amplified Analog Signal
- Temperature compensated: 0°C~+60°C
- Low cost

## 1. Technical specifications

### 1.1 Basic value

Table 1. Unless otherwise specified, measurements were taken with a a temperature of  $25\pm 1^{\circ}\text{C}$  and humidity ranging from 25% ~ 85%RH(supply voltage:5 Vdc or 3.3V)

Item		Data	Unit
Available Pressure Range		-100...-0.5~0~0.5...700	kPa
Power Supply		5/3.3	Vdc
Max. Excitation Current		3	mA
Output Range		0.5~4.5/0.2~2.7	Vdc
Total Accuracy	10kPa<Pressure≤200kPa	±2	%Span
	Pressure≤10kPa or >200kPa	±2.5	
Long Term Stability		±0.5	%Span
Over Pressure	Pressure ≤ 5kPa	5x	Rated
	5kPa<Pressure≤200kPa	2.5x	
	200kPa<Pressure	1.5x	
Burst Pressure	Pressure ≤ 5kPa	10X	
	5kPa<Pressure≤200kPa	3x	
	200kPa<Pressure	2x	
Max.Pressure on P2 port		500	kPa
Compensated Temp.		0 ~ 60	°C
Operating Temp.		-20 ~ 100	°C
Storage Temp.		-30 ~ 125	°C
Response Time		2.5	mS

1. Pressure Range(Operating pressure): The available pressure range including various span, not a specific pressure range .
2. Power Supply:
  1. Acceptable voltage deviation is within 5% of the specified voltage(e.g. 4.75~5.25V @5V working voltage)
  2. Optional working voltage can be 2V to 5.5V with ratiometric or specific voltage output (note in purchase order).
3. Output Range:
  3. Output Range is defined as the output voltage from minimum rated pressure to maximum rated pressure, including
    1. Offset( Zero output) : it is defined as the output voltage at the minimum rated pressure;
    2. Full Scale Output (FSO): it is defined as the output voltage at the maximum or full rated pressure;
    4. Full Scale Span (FSS): it is the algebraic difference between the output voltage at FSO and Offset.

4. Output range can be customized under working voltage, e.g 0.2~4.7@5V;0.2~4.8@5V;0.12~2.8@3V etc,.
  5. Output value is nominal values without the count of Accuracy deviation.
4. Total Accuracy: The max. deviation in output from ideal transfer function at any pressure or temperature over the specified ranges, units are in percent of full scale span (%FSS), which mainly consists of: Offset and Span Shift;Linearity(Non-linearity); Repeatability; Pressure Hysteresis ; TcOffset and TcSpan.
1. The accuracy in table is the typical output accuracy. The accuracy is not identical according to different specified pressure range. Contact factory for more information or for higher accuracy requirement(e.g  $\pm 1\%$ Span) if need.
  2. Non-linearity(Linearity): the deviation of measured output from "Best Straight Line" through three points (Offset pressure, FS pressure and  $\frac{1}{2}$  FS pressure)at constant temperature.
  3. Repeatability: the deviation of measured output when the same pressure is applied continuously, with pressure approaching from the same direction within the specified operating pressure range, under the same operating conditions.
  4. Pressure Hysteresis: the deviation of measured output at any pressure within the specified range, when this pressure is applied continuously, with pressure approaching from opposite directions within the specified operating pressure range, under the same operating conditions.
5. Long Term Stability: the sensor's output deviation when subjected to 1000 hours pressure test.
6. Over Pressure (Proof pressure): the maximum pressure which may be applied without causing durable shifts of the electrical parameters of the sensing element and remain the specification once pressure is returned to the operating pressure range.
7. Burst Pressure: the maximum pressure which may be applied without causing damage to the sensing die or leaks; The sensor should not be expected to recover function after exposure to any pressure beyond the burst pressure.
8. Compensated Temperature: the temperature range over which the sensor have an output proportional to pressure within the specified performance limits.
9. Operating Temperature (or Ambient Temperature): the temperature range over which the sensor have an output proportional to pressure but may not remain within the specified performance limits.
10. Response Time: it is defined as the time for the incremental change in the output from 10% to 90% of its final value when subjected to a specified step change in pressure.

1.2. Electrical performance

Table 2. Electrical performance

Parameter	Min.	Typ.	Max.	Unit
Power Supply			5.5	V
Working Current		100		nA
Filter Capacitor		100		nF
PSRR		60		dB
Output Current Load			5	mA
Input Common Mode Rejection Ratio	80	110		dB
Short-circuit Current Limit	15	20	25	mA
Upper limit Clamping Voltage	3/4		1	VDD
Lower limit Clamping Voltage	0		1/4	VDD

2. Block diagram

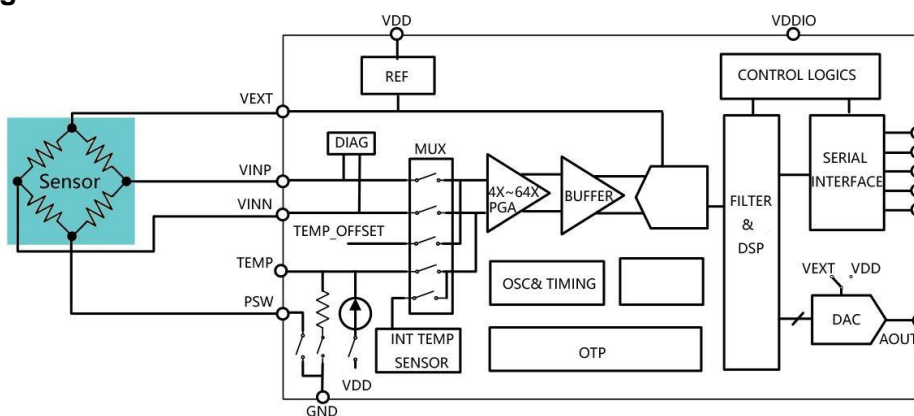


Figure 2.1. Block diagram

3. Circuit diagram

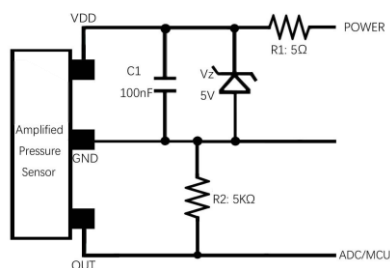


Figure 3.1. Diagram state schematic connection only; Check Pin allocation in Dimension drawing.

4. Mechanical dimension and electrical connection

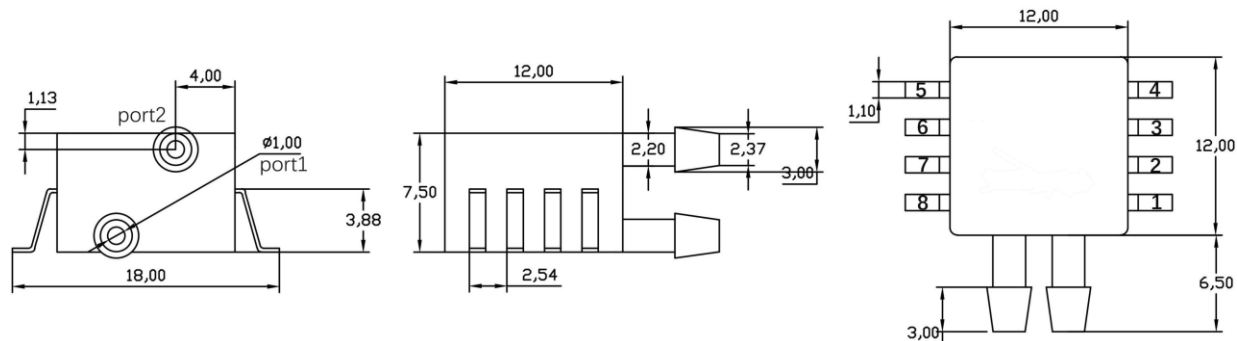


Figure 4.1. Dimensions in mm

Table 3. Pin definition


Pin number	Name	Function
1,3,4,7,8	N/C	Do not connect to external circuitry or ground
6	VDD	Voltage supply
5	OUT	Output voltage
2	GND	Ground

Notes:

1. Implement ESD protection during whole soldering and assembly process.
2. Overload voltage(max.6.5Vdc) or current(max.5mA) may burn the ASIC and cause the sensor fail thoroughly.
3. More details about soldering and storage etc., get from us.

## 5. Order information

<b>SSPS-TCD100</b>		Series compensated, surface mount housing – SOP with 8 pins.			
	<b>D</b>	Positive differential type			
	<b>DN</b>	Negative differential type			
	<b>PN</b>	Positive + Negative (P+N) Differential type			
		<b>KP</b>	kPa		
		<b>HP</b>	hPa		
		<b>HP010</b>	0~1kPa/0~10mbar/0~100mmH2O (only positive)		
		<b>HP025</b>	0~2.5kPa/0~25mbar/0~250mmH2O (only positive)		
		<b>KP005</b>	0~5kPa/0~50mbar/0~500mmH2O (only positive)		
		<b>KP010</b>	0~10kPa/0~100mbar/0~75mmHg (only positive)		
		<b>KP040</b>	0~40kPa/0~400mbar/0~300mmHg (only positive)		
		<b>KP050</b>	0~50kPa/0~500mbar/0~375mmHg (only positive)		
		<b>KP100</b>	0~100kPa/0~1bar/0~14.5PSI (only positive)		
		<b>KP200</b>	0~200kPa/0~2bar/0~29PSI (only positive)		
		<b>KP700</b>	0~700kPa/0~7bar/0~100PSI (only positive)		
		<b>HP005</b>	-500~500Pa/-5~5mbar (only P+N)		
		<b>KP001</b>	-1~1kPa/-10~10mbar/-100~100mmH2O (only P+N)		
		<b>HP025</b>	-2.5~2.5kPa/-25~25mbar/-250~250mmH2O (only P+N)		
		<b>KP005</b>	-5~5kPa/-50~50mbar/-500~500mmH2O (only P+N)		
		<b>KP040</b>	-40~40kPa/-400~400mbar/-300~300mmHg (only P+N)		
		<b>KP100</b>	-100~100kPa/-1~1bar/-14.5~14.5PSI (only P+N)		
		<b>KP200</b>	-100~200kPa/-1~2mbar/-14.5~29PSI (only P+N)		
		<b>KP100</b>	-100~0kPa/-1~0mbar/-14.5~0PSI (only negative)		
			<b>5</b>	Power supply – 5 V	
			<b>3</b>	Power supply – 3.3 V	
<b>SSPS-TCD100</b>	<b>D</b>	<b>KP</b>	<b>100</b>	<b>5</b>	Example: SSPS-TCD100DKP1003

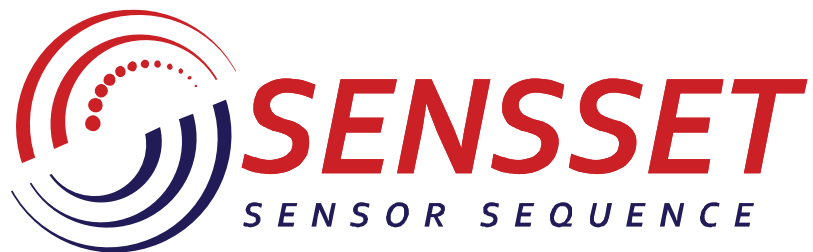

[www.sensset.ru](http://www.sensset.ru)

8 (812) 309-58-32 доб. 150  
info@sensset.ru

198099, г. Санкт-Петербург  
ул. Калинина, дом 2, корпус 4, литера А.



Development, production and supply of high-tech sensors